

# 2-DIN 12.331300-02

## APPLICATIONS

# Toyota Corolla 2003-2007


### KIT FEATURES

- Double DIN Radio Provision
- Stacked ISO Units Provision




### KIT COMPONENTS

A) Double DIN Trim Plate B) Double DIN Brackets

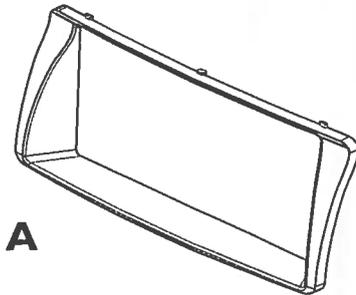

**A**

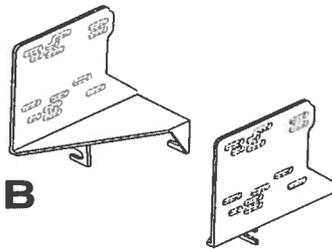

**B**

### TOOLS REQUIRED:

- Small Flat Blade Screwdriver
- Panel Removal Tool
- Phillips Screwdriver
- Socket Set



# **TABLE OF CONTENTS**

## **Dash Disassembly**

**- Totota Corolla 2003-2007 ..... 1**

## **Kit Assembly**

**- Double DIN Radio Provision ..... 2**

**- Stacked ISO Units Provision..... 3**

**Final Assembly ..... 4**

**\*Note:**


**Refer also to the instructions included with the aftermarket radio.**

## **TOYOTA COROLLA 2003-2007**


- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the gear shifter trim panel. (Figure A)
- 3** Remove the center a/c knob and (1) Phillips screw exposed behind it. (Figure B)
- 4** Unclip and remove the a/c-pocket assembly. (Figure C)
- 5** Remove (4) 10 MM bolts from the bottom of the radio then unclip and remove the factory radio and trim panel together. Unplug radio from factory harness. (Figure D)
- 6** Unclip and remove the radio trim panel including the a/c vents from the factory radio.

*Continue to kit assembly.*


**A**

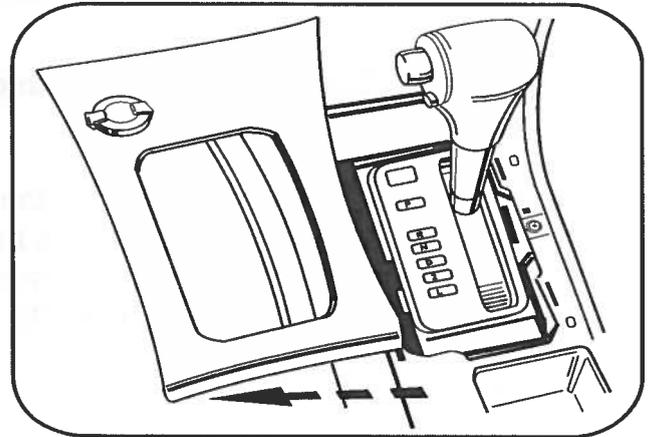


**B**

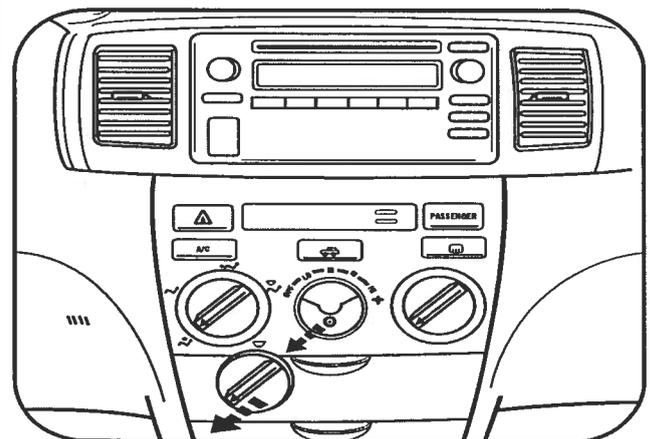

**D**

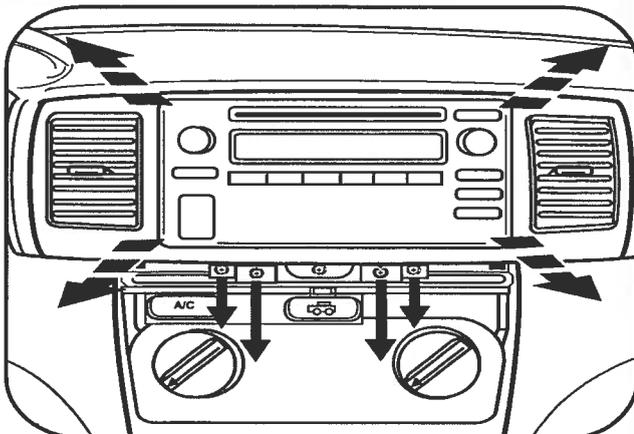

**C**


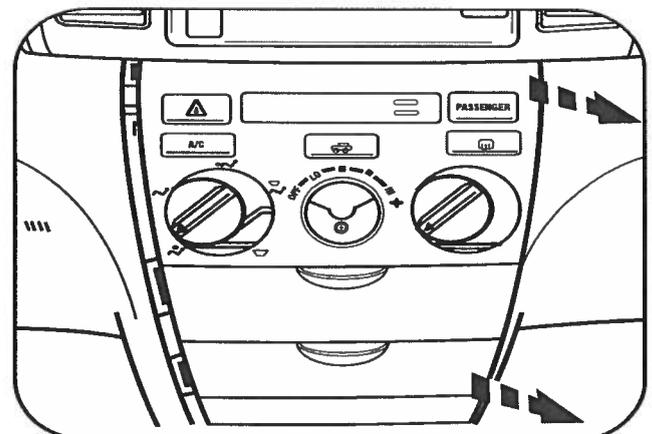


## DOUBLE DIN RADIO PROVISION

*\*Note: Refer also to the instructions included with the aftermarket radio.*

- 1 Snap the Double DIN trim plate into the factory trim panel. (Figure A)
- 2 Slide the Double DIN radio into the Double DIN brackets and secure the radio to the brackets using the screws supplied with the radio. (Figure B)

*Continue to final assembly.*

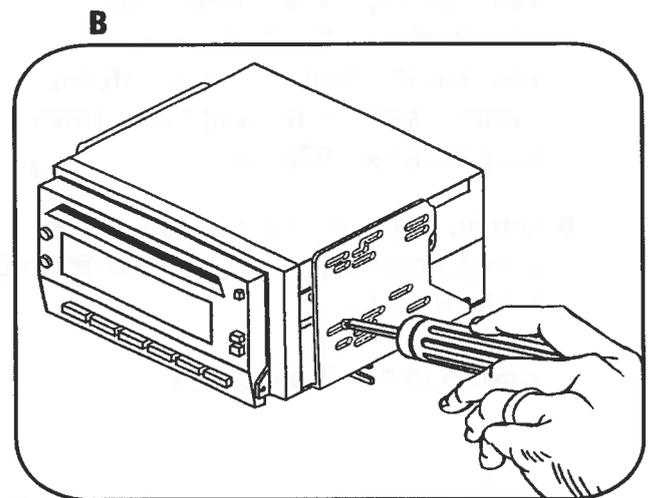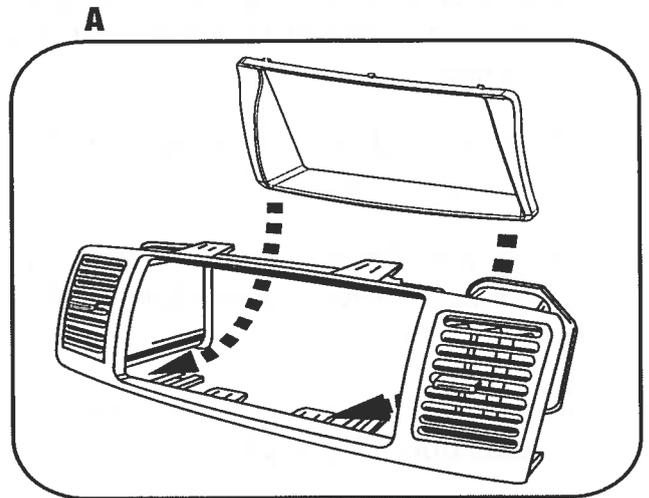

## STACKED ISO UNITS PROVISION

*\*Note: Refer also to the instructions included with the aftermarket radio.*

- 1 Snap the Double DIN trim plate into the factory trim panel. (Figure A)
- 2 Slide the stacked ISO units into the Double DIN brackets and secure the units to the brackets using the screws supplied with the units. (Figure B)

*Continue to final assembly.*

