

INSTALLATION SPECIFICATION "PLIP" ALARM




VEHICLE: VOLKSWAGEN JETTA

- Year of registration 2006

SPECIFICATION Nr.: 46-20 / PLP

Yellow/Blue	Green/Blue	White/Light blue	Yellow/Red
0,5 mm ² YELLOW wire, pos. 16, 20-way multiple black connector, numbered section from 1 to 18 connected to the window winder motor, inside the driver side door.	0,5 mm ² VIOLET wire, pos. 11, 20-way multiple black connector, numbered section from 1 to 18 connected to the window winder motor, inside the driver side door.	0,5 mm ² WHITE-GREEN wire, pos. 13, 20-way multiple black connector, numbered section from 1 to 18 connected to the window winder motor, inside the driver side door. Insert a diode as per the diagram.	0,5 mm ² BROWN-GREEN wire, pos. 7, 32-way grey-violet connected to the window winder motor, inside the driver side door. Insert a diode as per the diagram.

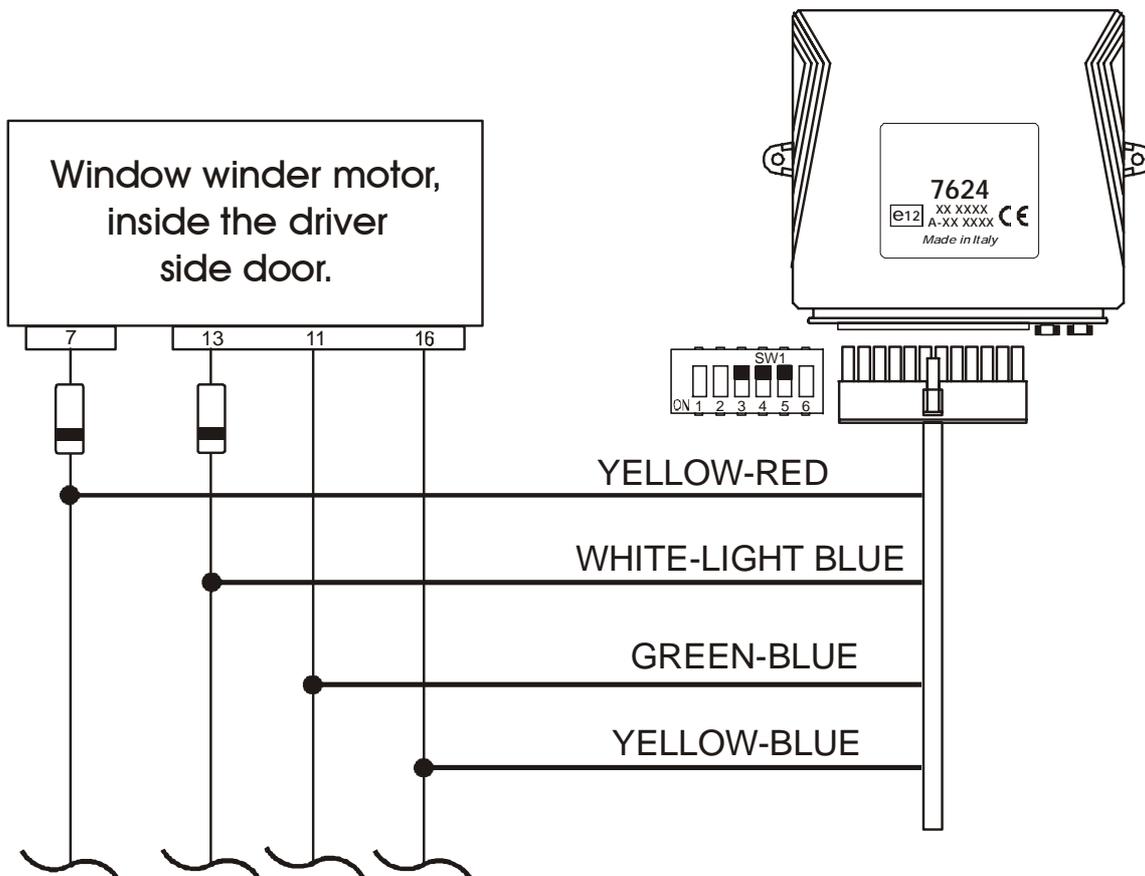

Note: Alarm can be armed only by the original remote control.
Alarm arming and disarming can be carried out if the opening push-button on the transmitter is pushed continuously.

ATTENTION: For the alarm installation, the wire running and the electrical connection of : supply, turn signals, positive under key, engine immobiliser, door, hood and trunk switches, please refer to the installation specifications, for traditional (radio controlled) alarms, concerning the specific vehicle.

NOTE: We suggest to disable the current absorption sensor.

NOTE: ALL INFORMATION INCLUDED IN THESE SPECIFICATIONS ARE MERELY INDICATIVE AND NOT RESTRICTIVE.