

# INFODAPTER



The INFODAPTER allows vehicle information such as climate control, parking sensor and heated seats to be displayed on any aftermarket AV head unit.

This information would usually be displayed on the original head unit and therefore would not be retained without the use of an INFODAPTER. The infodapter connects to the rear camera input and also maintains steering wheel control functionality.




Compatible with any head unit with reverse camera input

- ALPINE ● BLAUPUNKT SONY Clarion LG KENWOOD JVC  
 BEAT PHILIPS Pioneer Panasonic ZENEC BECKER  
 CASKA BOSS AUDIO SYSTEMS FlyAudio WINCA Freeway 飞豹 SKYPINE 美洛 SoundMax FORYOU

**CTUSK01**

## Diagram

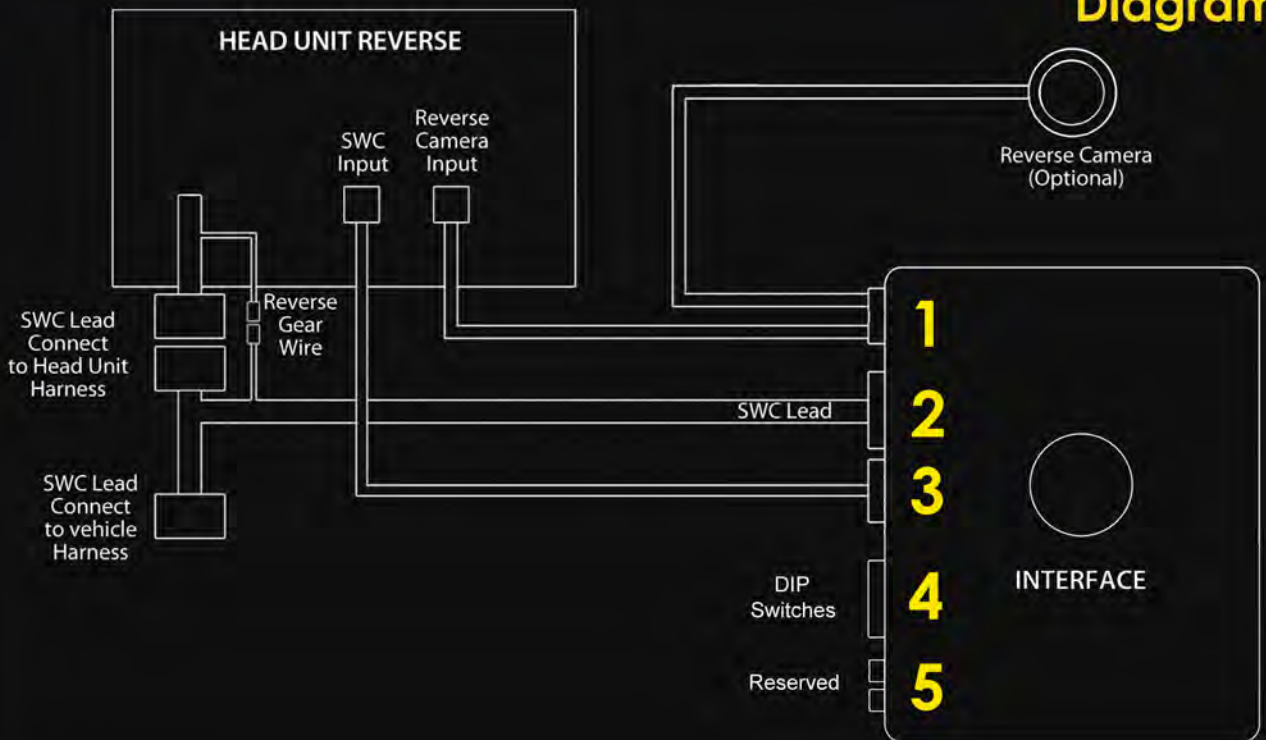

- 1** Reverse camera Input from Head unit, & reverse camera connection from vehicle (optional).
- 2** Main power harness, connecting to the vehicle harness and head unit  
**( Please ensure that the Reverse lead is connected )**
- 3** Steering wheel control input.
- 4** Dip Switch settings - Down = ON, Up = OFF
  - 1** ON = Pioneer Avic.  
OFF = All other units.
  - 2** Setting for Reverse camera ON = PAL, OFF = NTSC.
  - 3** Resets the Display settings back to Factory default.  
Selecting the dip switch Position to on, the menu background display will turn red indicating that factory default mode is enabled, please note no adjustment is possible whilst factory default mode is switched on.
  - 4** Not applicable.
- 5** Not Applicable.

## Menu User Guide





To Select the Menu, press and hold the scroll button in for 2 seconds, this will enable the menu.  
To select the option press the scroll button once.



To navigate through the menu options use the Track Up / Track down buttons.

### screen size and position

Adjust screen size & position, so all 4 corner markers are touching the corners of the aftermarket head unit display.

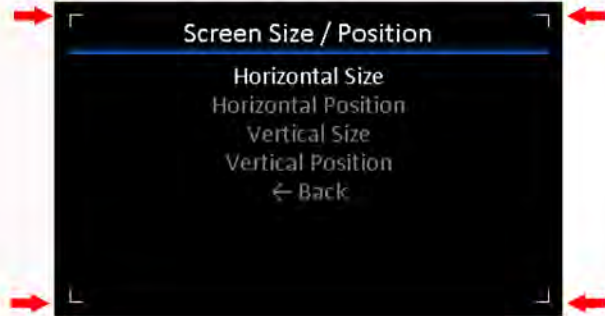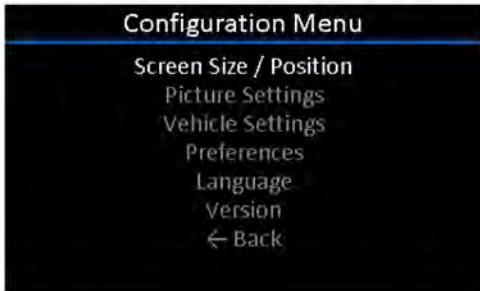


### Picture setting

Adjust Brightness/ Contrast/ Saturation



### Vehicle setting

set the driver position.

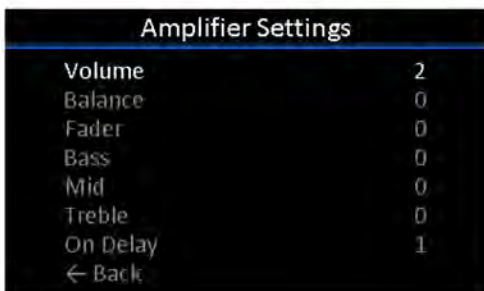




Amplifier Setting ( If Amplifier is fitted in vehicle )

Adjust the gain of the aftermarket head unit volume to match the Amplifier volume.

# Menu User Guide

## Preferences






Selecting the Park assist screen.

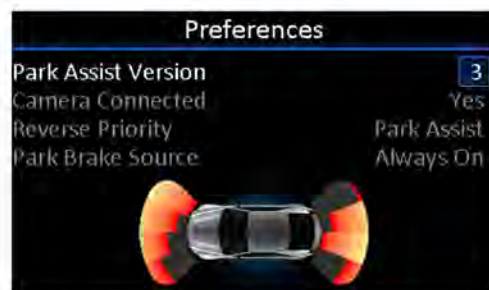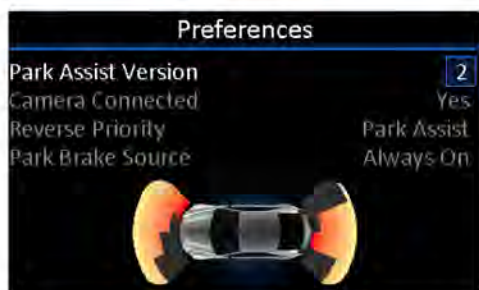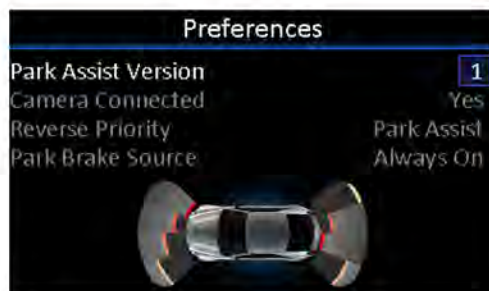

## Preferences

(Optional) Reverse camera connected, If reverse camera is connected, select the camera option in Reverse Priority.

**Note:** User can toggle between the Rear View camera display and OPS display by pressing and holding the Scroll button, whilst the vehicle is in reverse gear.

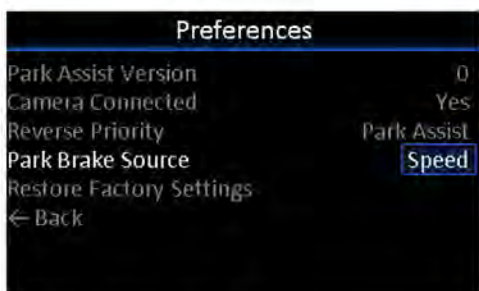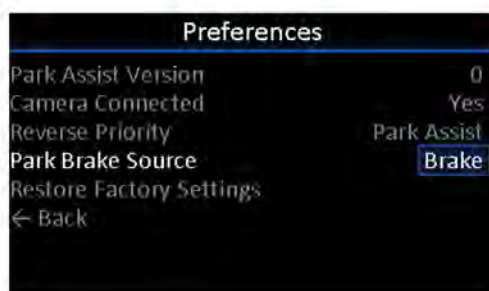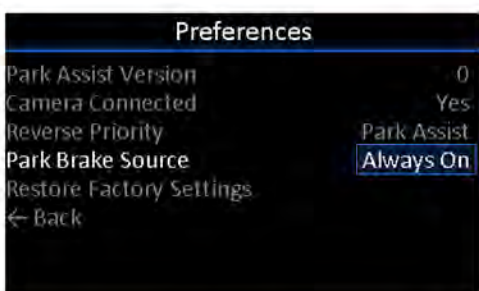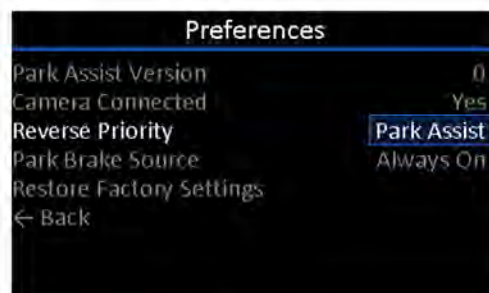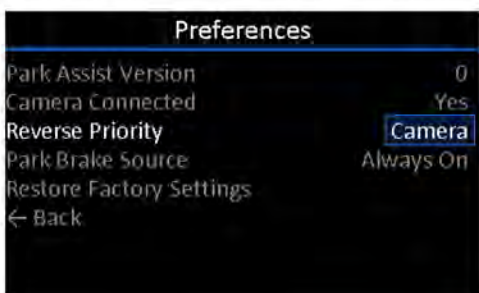

## Setting Park Brake Source

- Brake - Park output will be active when park brake on.
- Speed - Park output will be active when speed less than 3KMH
- Always on - Park output will always be active.

## Legal Information

By Law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving.