



INSTALLATION INSTRUCTIONS FOR PART 99-7608

APPLICATIONS

Nissan Cube 2009-up

99-7608





KIT FEATURES

- DIN Head Unit Provision with Pocket
- ISO DIN Head Unit Provision with Pocket
- Double DIN Head Unit Provision



KIT COMPONENTS

- A) Radio Housing • B) ISO Brackets • C) Trim Plate • D) Double DIN Trim Plate



WIRING AND ANTENNA CONNECTIONS (Sold Separately)

Harness:

- 70-7552 - Nissan harness 2007-up

Antenna Adapter:

- 40-N112 - Nissan antenna adapter 2007-up

TOOLS REQUIRED:

Small Flat Blade Screwdriver • Panel Removal Tool
Phillips Screwdriver



1-800-221-0932



www.metraonline.com

© COPYRIGHT 2009 METRA ELECTRONICS CORPORATION



99-7608

TABLE OF CONTENTS

Dash Disassembly

- Nissan Cube 2009-up	1
------------------------------------	----------

Kit Assembly

- DIN Head Unit Provision with Pocket	2
- ISO Head Unit Provision with Pocket	3
- Double DIN Head Unit Provision	4

<u>Final Assembly</u>	5
------------------------------------	----------

Note:

Refer also to the instructions included with the aftermarket radio.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra recommends MECP
certified technicians**




NISSAN CUBE 2009-UP

1 Disconnect the negative battery terminal to prevent an accidental short circuit.

2 Remove (2) Phillips screws from the bottom of the a/c trim panel then unclip and remove the panel. (Figure A,B)

3 Remove (2) Phillips screws from the bottom of the radio trim panel then unclip and remove the panel. (Figure C)

4 Remove (4) Phillips screws securing radio to dash to remove.

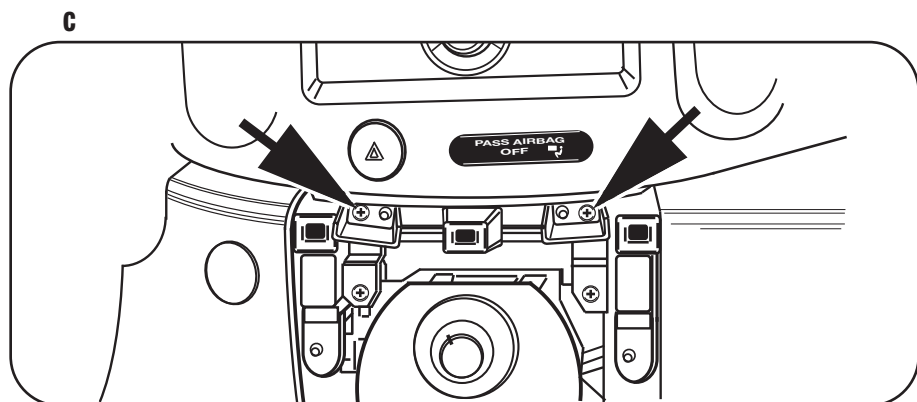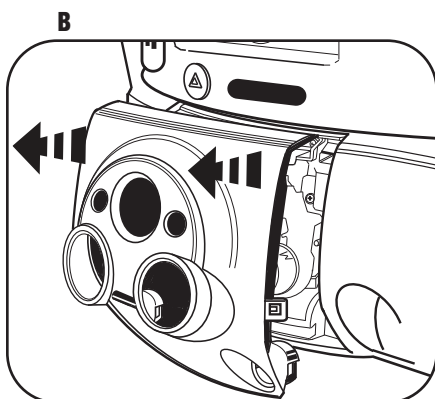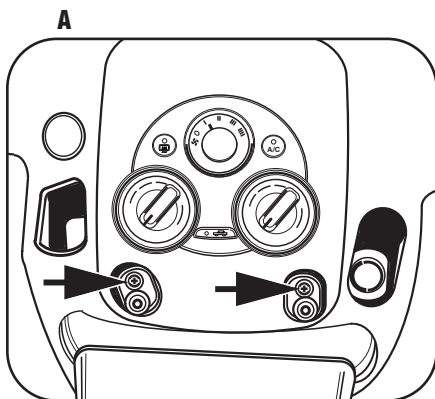

DIN HEAD UNIT PROVISION WITH POCKET

***Note:** Refer also to the instructions included with the aftermarket radio.*


***Note:** The DIN trim plate and DDIN trim plate have supports in the middle that can be removed with cutters and trimmed with a knife if necessary.*

***Note:** The aftermarket radio's trim plate must be removed prior to installation.*


- 1** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure A)
- 2** Slide the aftermarket head unit into the cage and secure. (Figure B)
- 3** Attach the trim plate supplied with the kit. (Figure B)

Continue to final assembly.

A

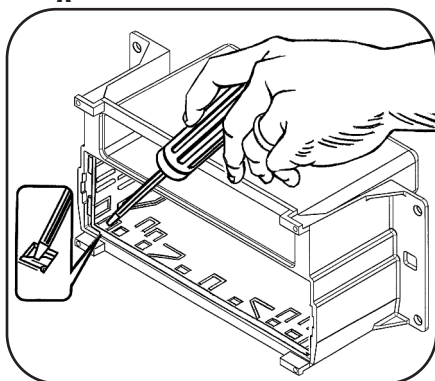


B

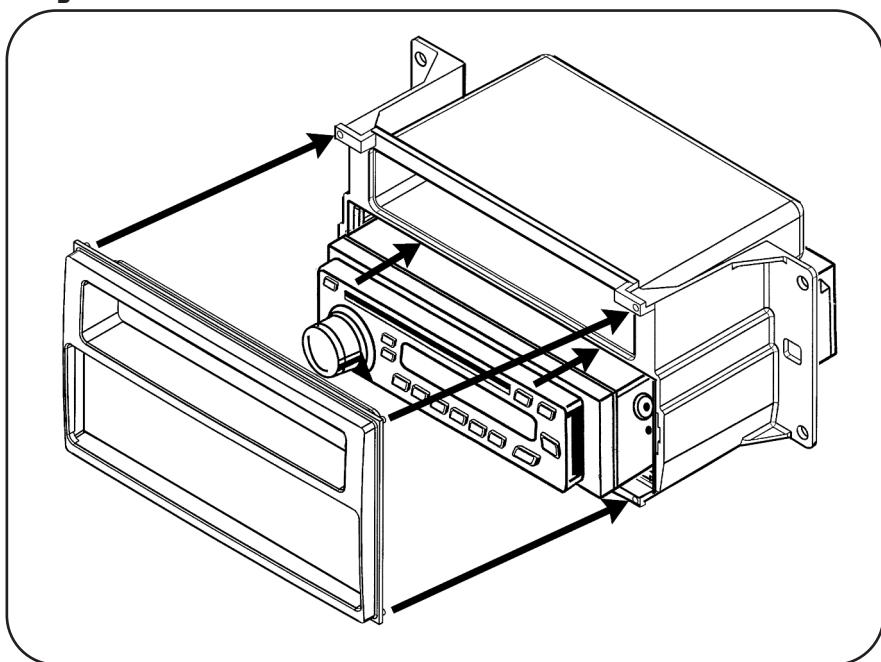


ISO DIN HEAD PROVISION WITH POCKET

****Note: Refer also to the instructions included with the aftermarket radio.***

- 1** Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Figure A)
- 2** Slide the head unit into the radio opening until the side clips engage. (Figure B)
- 3** Attach the trim plate supplied with the kit. (Figure B)

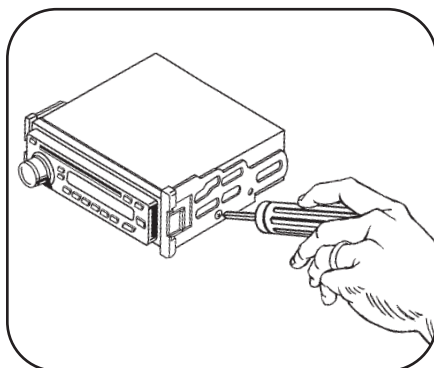A

Continue to final assembly.

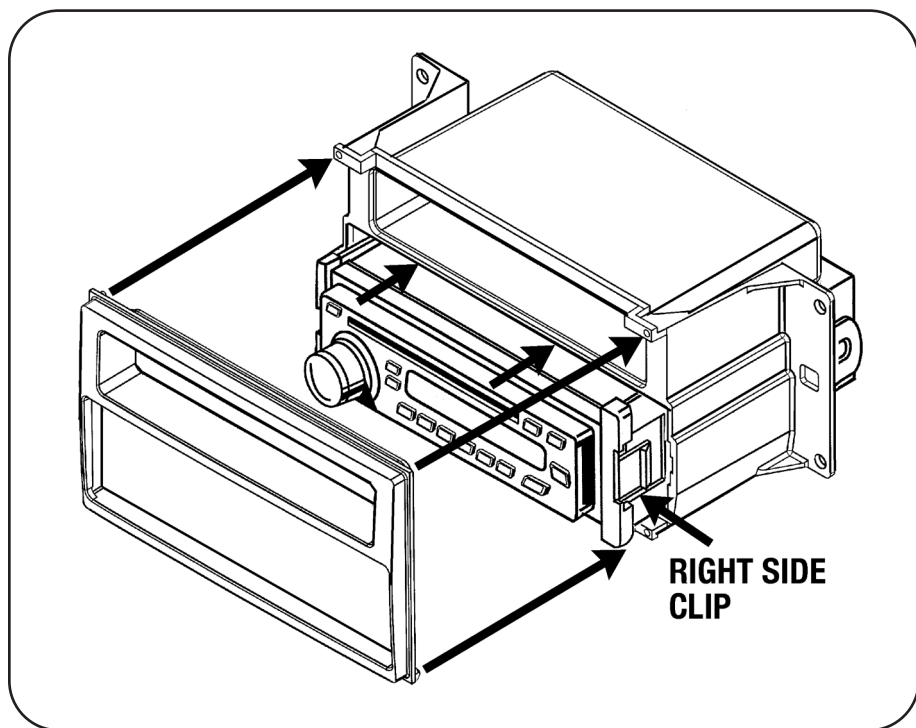B


DOUBLE DIN HEAD UNIT PROVISION

****Note:** Refer also to the instructions included with the aftermarket radio.*


- 1** Slide the DDIN radio unit into the factory brackets and secure the unit to the brackets using the screws supplied with the head unit. (Figure A)
- 2** Place the DDIN trim plate over the face of the aftermarket radio or into the opening of the OE radio bezel prior to final assembly. (Figure A)

Continue to final assembly.

A

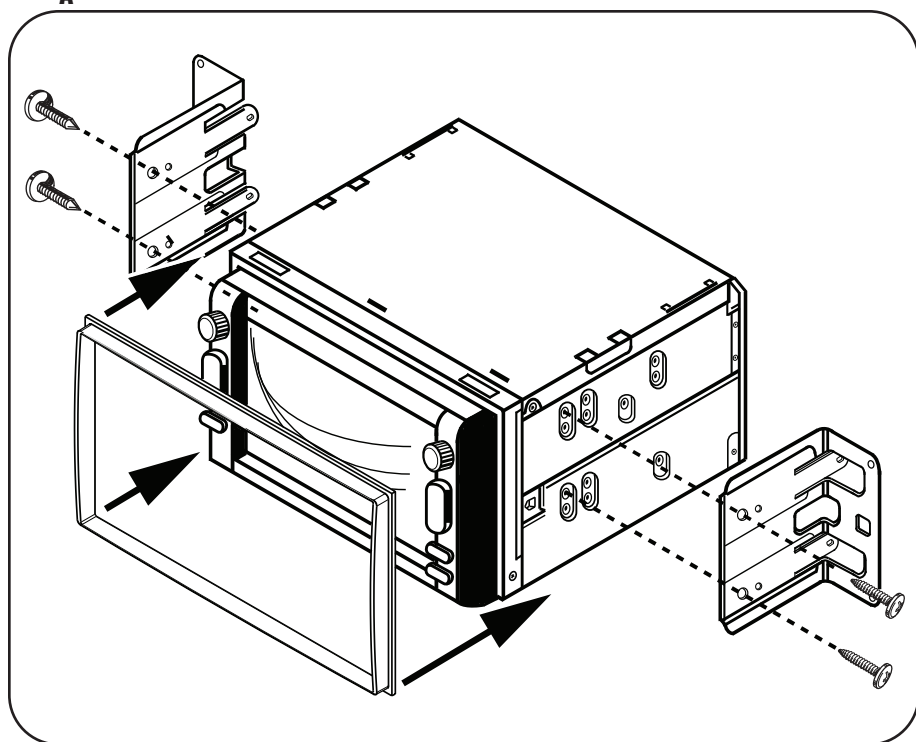

FINAL ASSEMBLY

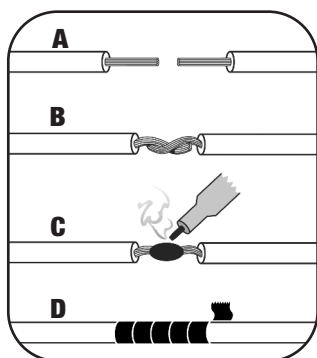

(A) Strip wire ends back 1/2"

B) Twist ends together

C) Solder

D) Tape

- 1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit.)
- 2 Re-connect the negative battery terminal and test the unit for proper operation.
- 3 Reassemble radio and dash assemblies in reverse order of disassembly.

FINAL WIRING CONNECTIONS

Make wiring connections using the EIA color code chart shown below and the instructions included with the head unit. Metra recommends making connections as shown below; Strip, Splice, Solder, Tape. Isolate and individually tape off ends of any unused wires to prevent electrical short circuit.

METRA / EIA WIRING CODE

12V Ignition / Acc.	Red	Right Front (+)	Gray
12V Batt / Memory	Yellow	Right Front (-)	Gray/ Black
Ground	Black*	Left Front (+)	White
Power Antenna	Blue	Left Front (-)	White / Black
Amp Turn-On	Blue / White	Right Rear (+)	Violet
Amp Ground	Black / White	Right Rear (-)	Violet / Black
Illumination	Orange	Left Rear (+)	Green
Dimmer	Orange / White	Left Rear (-)	Green / Black

***NOTE:** When a Black wire is not present, ground radio to vehicle chassis.

All colors may not be present on all leads due to manufacturer's specifications.

99-7608 INSTRUCTIONS



1-800-221-0932



www.metraonline.com

REV. 07/25/11 © COPYRIGHT 2009 METRA ELECTRONICS CORPORATION INST99-7608