

Installation Manual:  
Toyota Aygo 2005>

CT23PE07



Kit Includes:

- A: 1 x 2 Din Facia Plate
- B: 1 x Pair of Brackets

1. In order to remove the original head unit, lever off the fan control button with a plastic panel removal tool.



2. Remove the screw which is behind the fan control button.



# CT23PE07


2. Lift the bottom of the panel upwards and pull the panel out.



3. Disconnect the connectors from the back of the head unit.




4. Disconnect the three buttons from the rear of the panel. Remove panel and put to one side.

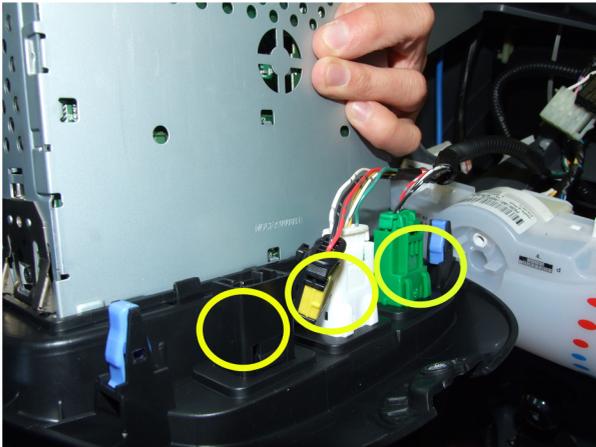

5. Unscrew the centre screw from the plastic housing at the rear of the aperture (circled).



6. Cut and remove the plastic housing along the 3 lines.

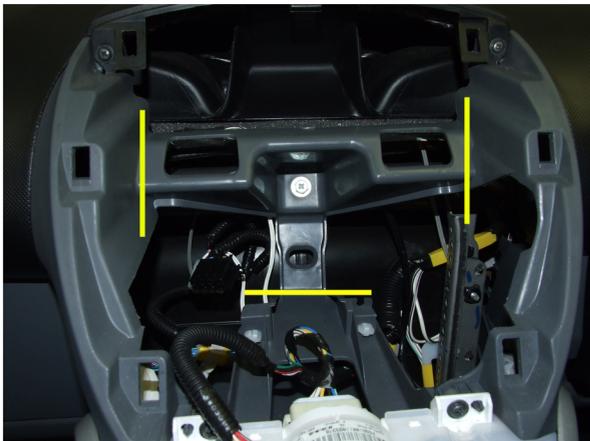

7. Take the original panel and remove the 3 buttons from the bottom. The buttons are unclipped from the rear of the panel and pushed forward. Insert the buttons into the supplied facia plate.




# CT23PE07

8. Screw the two brackets to the fascia plate, using the screws supplied.



9. Take the aftermarket head unit and line it up with the holes as shown. The head unit is offered to the fascia plate from the rear.

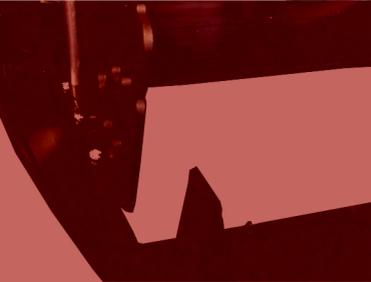

ed, screw the head unit to the es.

11. Re-connect the buttons (reverse of step 4). Connect the wiring harness and the antenna from the car to the aftermarket head unit. Insert the aftermarket head unit and fascia into the dash. The fascia clips in as the original fascia panel does.

10. Using screws supplied, screw the brackets on both sides.



place (reverse of step 2) n removed in step 1.

12. Screw the fascia in place. Re-attach the buttons.

