




Installation Manual Double DIN Kit 381320-10-1

- VW Caddy (Typ 2K) / VW Eos
- VW Golf V / VW Golf Plus
- VW Golf VI 2008->
- VW Jetta 2003-2008
- VW Passat (Typ 3C) / CC
- VW Polo 2010->
- VW Scirocco III 2008->
- VW Tiguan / VW Touran

Compatible with double DIN devices

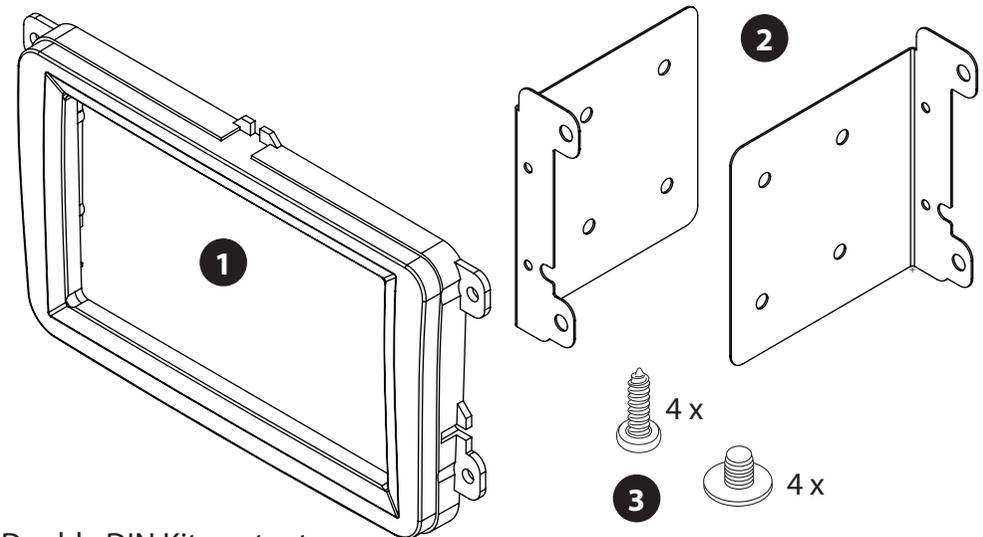

Double DIN Kit contents:

- Facia Plate (1)
- Metal Brackets (2)
- Fixing Screws (3)

Installation Manual Double DIN Kit 381320-10-1



VW Golf V only:

Pull up the aircone unit (fixed by clips). Remove two Torx (TX20) screws (see arrows) which become visible.




1. Remove the original trim frame, surrounding the radio (fixed by clips).




2. Remove the 4 Torx (TX20) screws (These screws will be used again later).

Remove the OEM head unit.

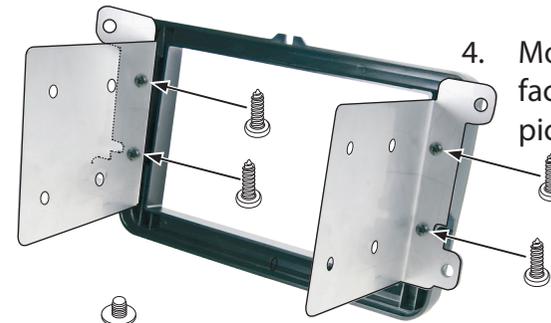

4. Mount both metal brackets at the fascia plate as shown in the sample picture on the left.

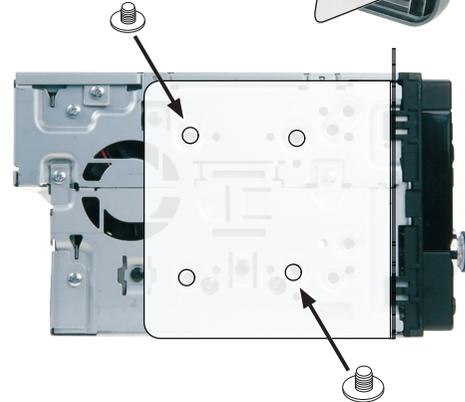

5. Push the double DIN head unit into the fascia plate and fix the sides of the head unit with 2 screws on each side.



6. Connect all wires and fix the double DIN head unit with the original Torx (TX20) screws (which have been removed in step 2)

7. Reinstall everything in reverse order to finish installation.