

2868 Installation Kit Double Din Toyota Avensis 2004->



Exemple :

Nous utilisons la position n°2 mais vous pouvez utiliser d'autres selon votre installation.

-Utiliser les trous n°2 marqué d'une croix et sur l'autoradio les positions n°10 et 12 marqué d'une flèche.aux emplacements des flèches.

Visser sur votre autoradio vos 2 sets de fixation de façon symétrique à gauche et à droite de l'autoradio.

- Installer le support et la façade ainsi que les faisceaux et connecter les au nouvel autoradio.

- Connecter l'autoradio Double Din à l'aide de faisceaux spécifiques au véhicule et mettre en place l'autoradio.



1 Remove the dashboardpanels around the radio at the location of the arrows.




2 Remove the frame above the radio by using a plastic wedge at the location of the arrows.



3 Remove the original radio at the location of the arrows. The radio is tighten by four screws.



4

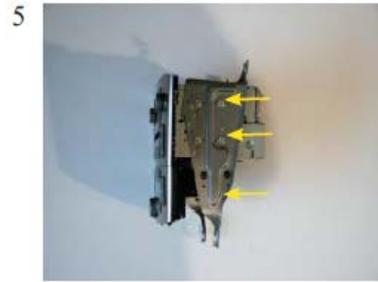

5

Remove the original OEM metal brackets from the radio and the climate control unit. This is tighten by twelve screws.



6

Remove the original radio from the climate control. Slide the climate control unit to the right.



7

Place the new metal bracket and the climate control unit between the OEM radio brackets. Tighten the climate control with the four original screws.



8

Place the OEM replacement panel on the climate control unit by sliding it to the left .



9

Place the OEM replacement panel with the climate control unit and the metal bracket into the dashboard.



10

Place the new headunit.



11

Place the radio trim and replace all dashboardpanels in reverse order.