


1. Unclip OEM panel (see arrows)




2. Remove panel

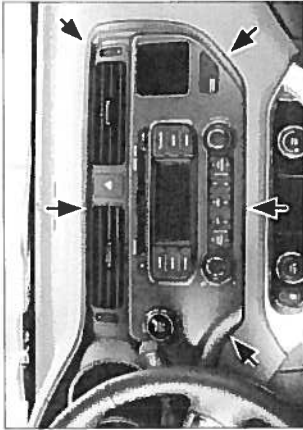


3. These parts need to be removed from OEM panel:


- hazard light switch (1)
- air vents (left / right) (2)
- passenger air bag switch (3)

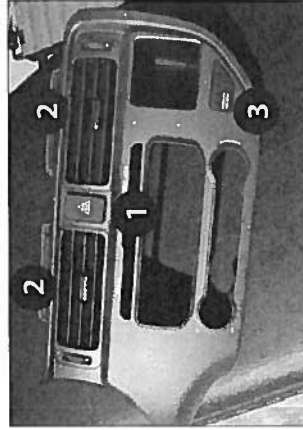


4. Remove hazard light switch

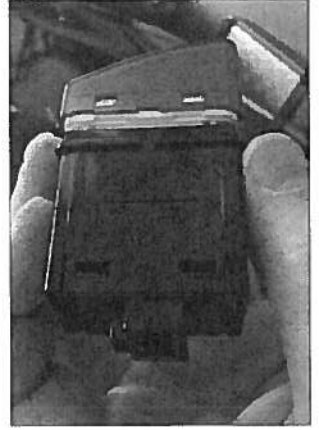

5. Remove air vents

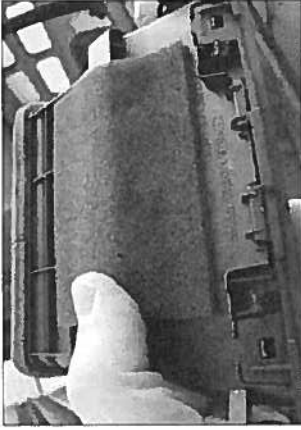

6. Remove passenger air bag switch

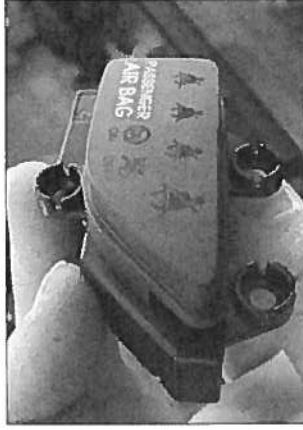

7. Only Kia Rio models with Engine start / stop button:


- Remove start / stop button
- Mount start / stop button to new fascia plate



8. Mount

- hazard light switch
- air vents (left / right)
- passenger air bag switch


to new fascia plate

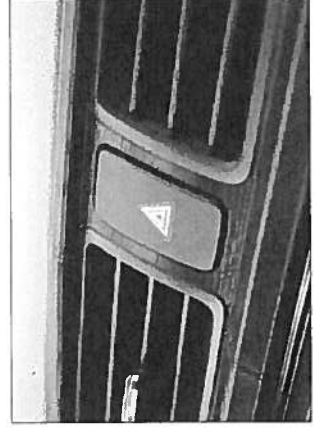



**Installation Manual
Double DIN Kit**

part-no.: 381178-29

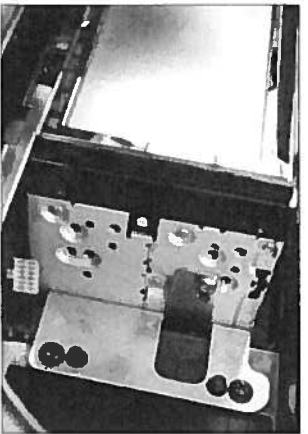

9. Mount metal brackets to double DIN Navigation



10. Connect all required circuit points of double DIN head unit
Fix double DIN head unit with 4 screws




11. Re-install everything in reverse order to finish installation

• **Kia Rio 2011->**

Compatible with these Double-DIN devices:

Double-DIN Navigation

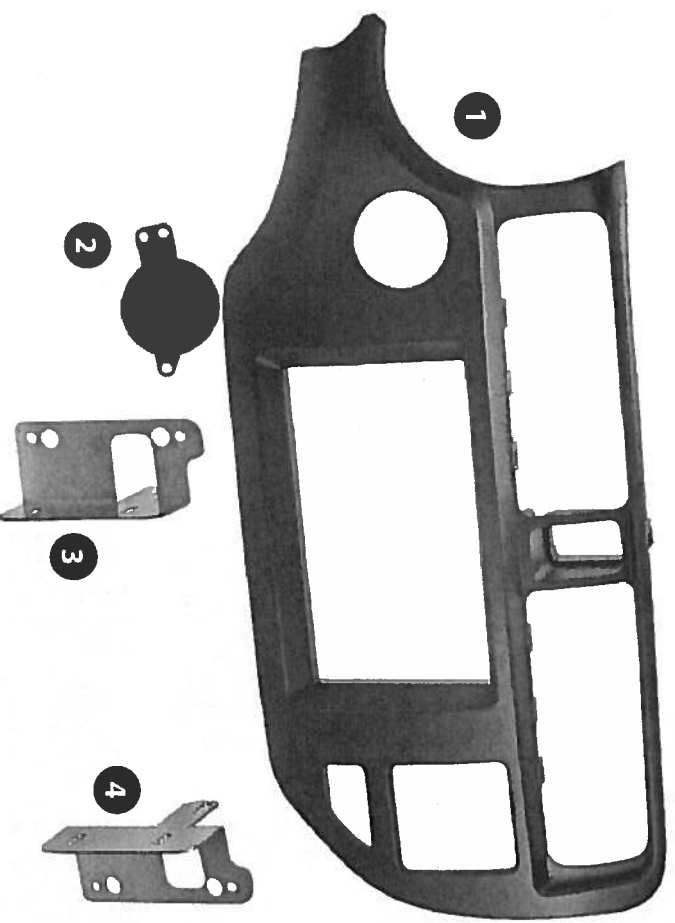

Double DIN Set contents

- (1) Facia Plate
 - (2) Cover*
 - (3) Mounting bracket (L)
 - (4) Mounting bracket (R)
- *(for models without engine start/stop button)