


Installation Manual Double DIN Kit




This is how the original dashboard looks like.

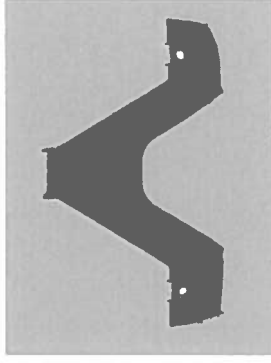

In figure are shown the plastic parts that have to be removed.




Remove the original plastic and/or the original car radio. Cut and remove the plastic parts shown in figure with ref.A, ref.B and ref.C.

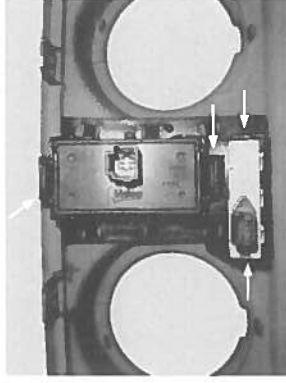

Remove the original connector from the fascia plate and place them on the new fascia plate.



After the cut, this is the result.

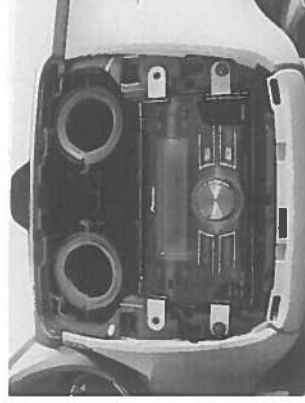

Connect all cables, mount the aftermarket car-radio + brackets to the brackets previously fitted inside the housing using the four screw supplied.

Fix the radio-frame.


All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.

DACIA LODGY

2012 ->

Compatible with double DIN devices

This is the result after the installation.

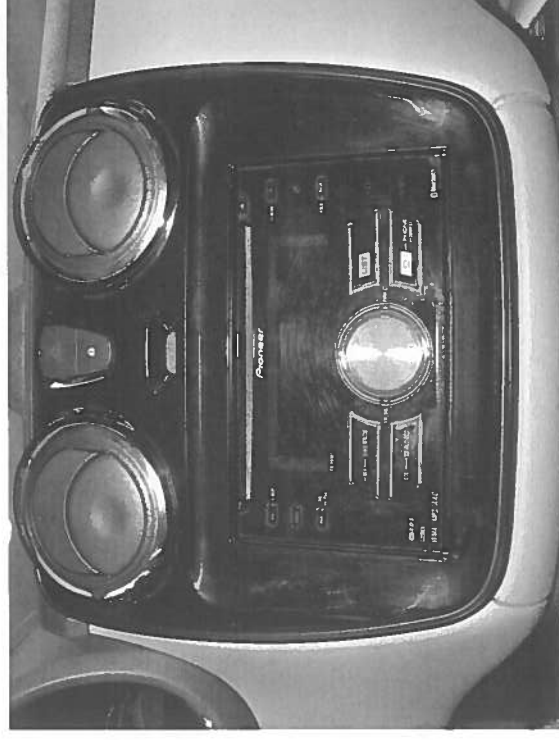

Double DIN Kit contents

Facia Plate
Mounting Brackets

01/2012 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.