



Installation Manual Double DIN Kit



The instructions works for the all type of original radio.

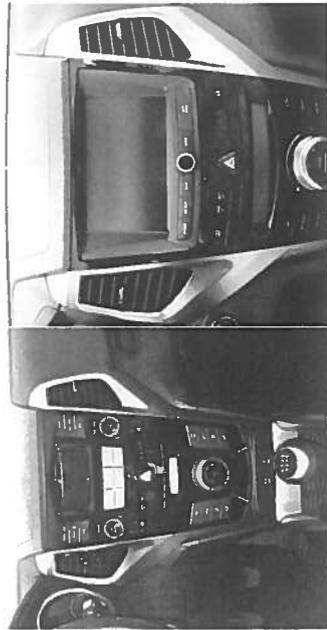

Unscrew and save the screws around the air controls and remove it.



Carefully remove the air vents and the AUX/USB interface as shown in the picture.




Unscrew the screws of the original radio and remove it.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.

SsangYong Tivoli 2015>

Compatible with double DIN devices

Take the left and right brackets and mount them on the two sides of the double din unit with supplied screws and fix the aftermarket radio to the fascia. Connect all cables.

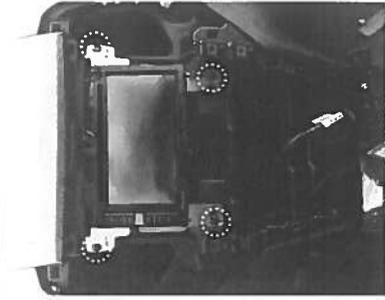

Place the new fascia plate and remount all the control panels on the dashboard. Replace the air vents.



Double DIN Kit contents

Facia Plate
Mounting Brackets

08/2014 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.