


MITSUBISHI PAJERO 2014->

Compatible with double DIN devices




Place the white clips and the display panel, previously stored, on the supplied fascia plate.

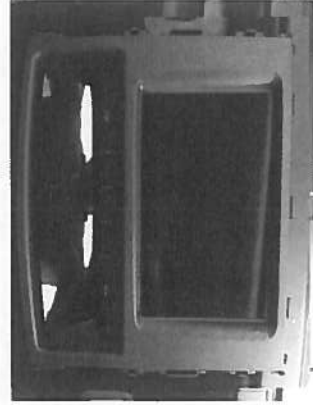

Take the left and right brackets and mount them on the AFT unit with the supplied screws. Connect all cables and, if necessary, the services bullets.



Fix the radio-frame and reassemble all the parts in the reverse order, doing all connections. Check the proper functioning of the whole system. Mount the fascia plate on the dashboard.

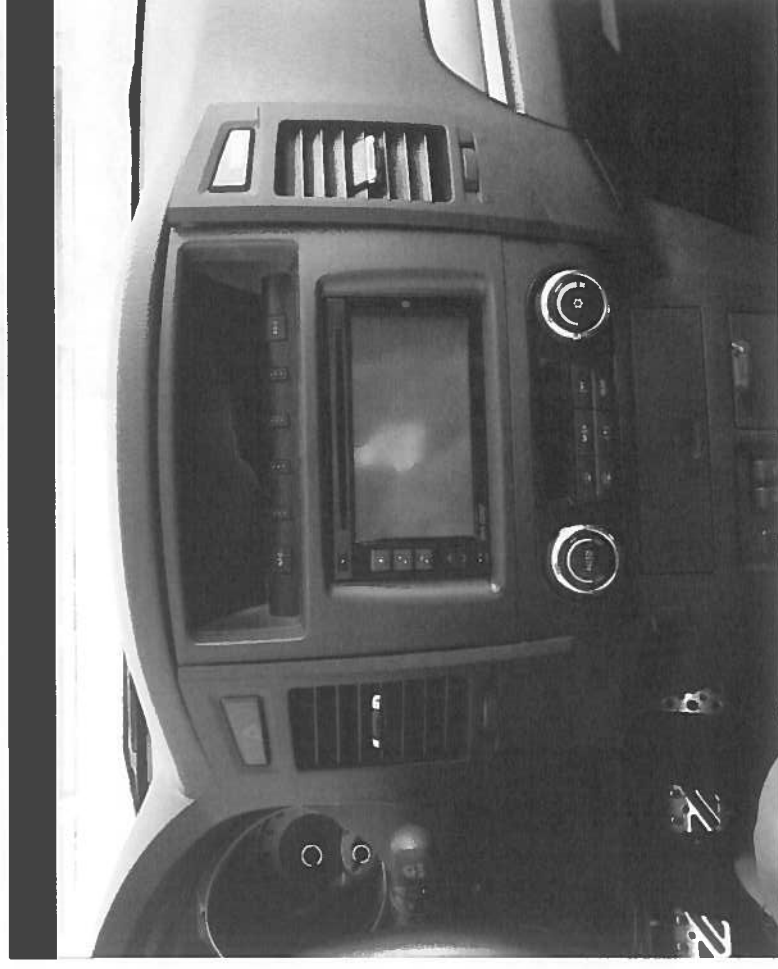

Double DIN Kit contents

Facia Plate

Mounting Brackets + screws

11/2014 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.

Installation Manual Double DIN Kit



This is how the original dashboard looks like.




Remove the air vents and unplug the connectors.




Remove the clima control panel.



Unscrew the two screws and remove the cover panel with radio unit controls.

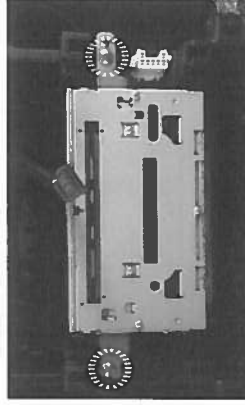

Unscrew the two screws and remove the original head unit.

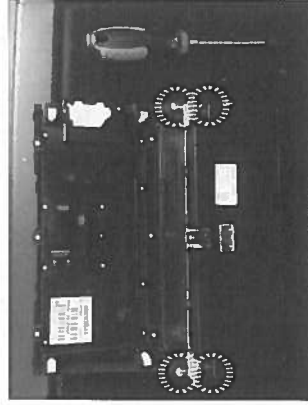

Unscrew and remove the display panel from the original plate; save the screws. Remove and save the six white clips from the original plate.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.