


1 Locate the factory wiring harness in the dash.

Re-connect the negative battery terminal and test the unit for proper operation.

2 Attach the Double DIN brackets to the aftermarket radio then mount the unit in the sub dash. (Figure A)

3 Reassemble dash in reverse order of disassembly using the trim panel instead of the factory trim panel.

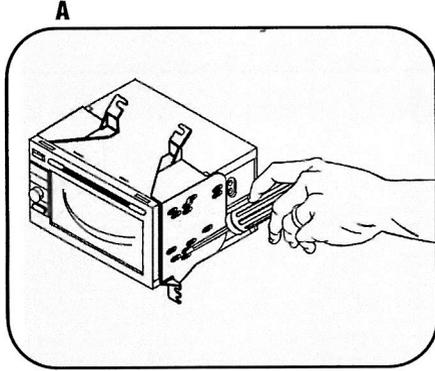

Installation Manual Double DIN Kit

Part-No.: CT23HY29

HYUNDAI GENESIS COUPE 2010 (WITH AUTO CLIMATE CONTROLS)


KIT FEATURES

- DDIN Head Unit Provision
- ISO Stacked Head Unit Provision
- Painted Silver to match factory finish




KIT COMPONENTS

A) Trim Panel B) Double DIN Brackets C) (6) PC-7503 Panel Clips

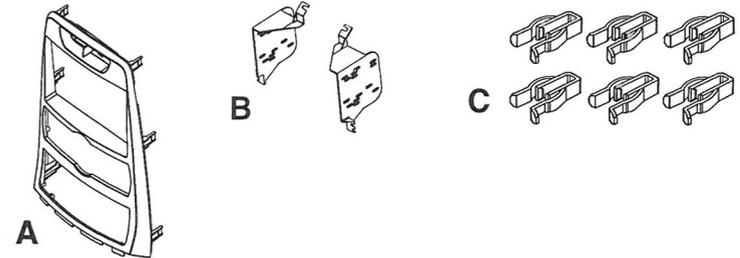

TOOLS REQUIRED:

- Small Flat Blade Screwdriver
- Phillips Screwdriver
- Panel Removal Tool
- Socket Wrench



Installation Manual Double DIN Kit Hyundai Genesis

1 Disconnect the negative battery terminal to prevent an accidental short circuit.




2 Unclip and remove the shifter trim panel. (Figure A)

3 Unclip and remove the radio/climate control trim panel. (Figure B)

4 Unclip and remove the display trim panel above radio. (Figure C)

5 Remove (4) Phillips screws securing the radio.

6 Remove (4) Phillips screws securing the climate control to the factory trim panel.

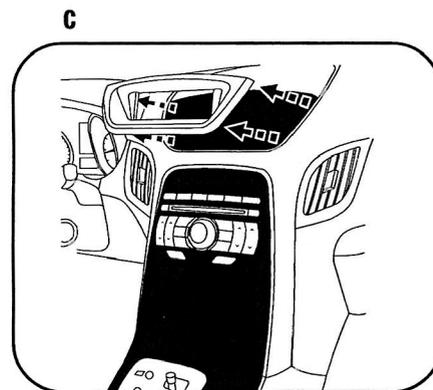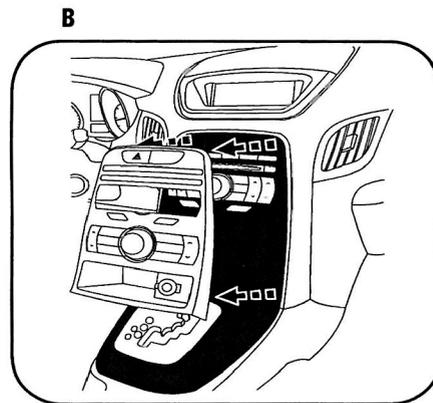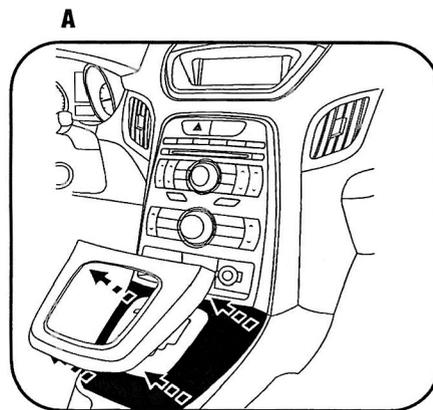

1 Attach the climate control to the trim plate using the factory hardware. (Figure A)

2 Attach the (6) panel clips to the trim plate. (Figure B)

