QUICK REFERENCE GUIDE

CRUISE CONTROL

&

SPEED LIMITER

AP900Ci
SL900Ci *Series*

LITEON

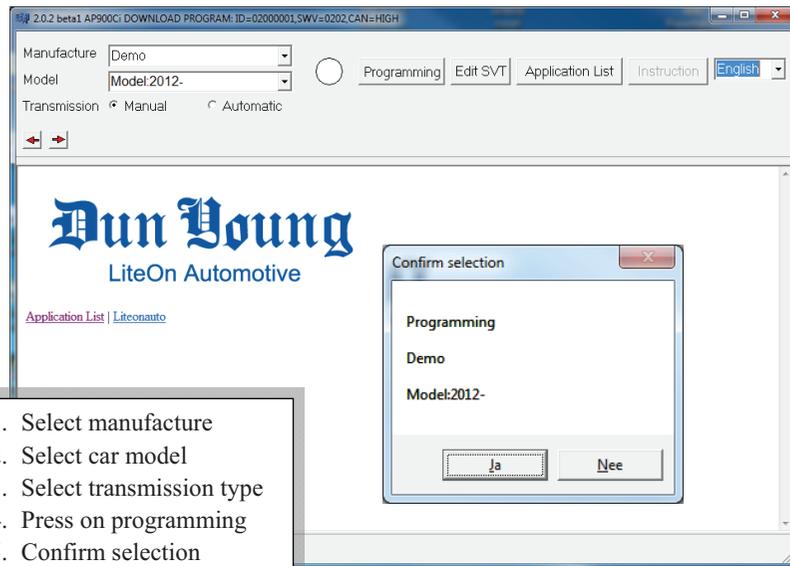Dealer address details:

231.0005250   rev.1.0

e1

03 5747

Program AP900Ci prior to the product installation.

Requirements:

- Internet connection

- Programming software, USB drive

- USB programming cable (p/n LTK.0900090)

Programming software and the USB driver can be downloaded from the following website: http://app.dunyoung.com/AP9HBCAN/

1. Select manufacture
2. Select car model
3. Select transmission type
4. Press on programming
5. Confirm selection

Connect the CAN-bus wires and the +15 wire according to the connection points given in the instruction that is launched after completion of the programation.

Connect the T-harness to the throttle pedal and Cruise Control electronics module. Install and connect the command modules.

The cruise control functions are locked from factory for security reasons.

Follow the next system test procedure to unlock the software:

0. Start engine
1. press ON/OFF key 1 time
2. press and hold SET key
3. press and release brake pedal 4 times (buzzer sound 4 low tones (test starts))
5. release SET key and wait for 3 seconds
6. press brake gently (brake lights should illuminate) when buzzer sounds
7. release brake while buzzer stops
(step 6 & 7 will be repeated 3x)
8. Buzzer will sound 4 hi tones if tested passed
   Buzzer will sound hi-lo tones if test not passed. Check if the right vehicle is selected for programing and repeat the test.