


Dashboard after plastic has been cut away



Remove air vent unit from OEM panel

Mount air vent unit to double DIN head unit


Connect all required circuit points. Mount double DIN head unit to dashboard. Place fascia plate. Reinstall everything in reverse order to finish installation

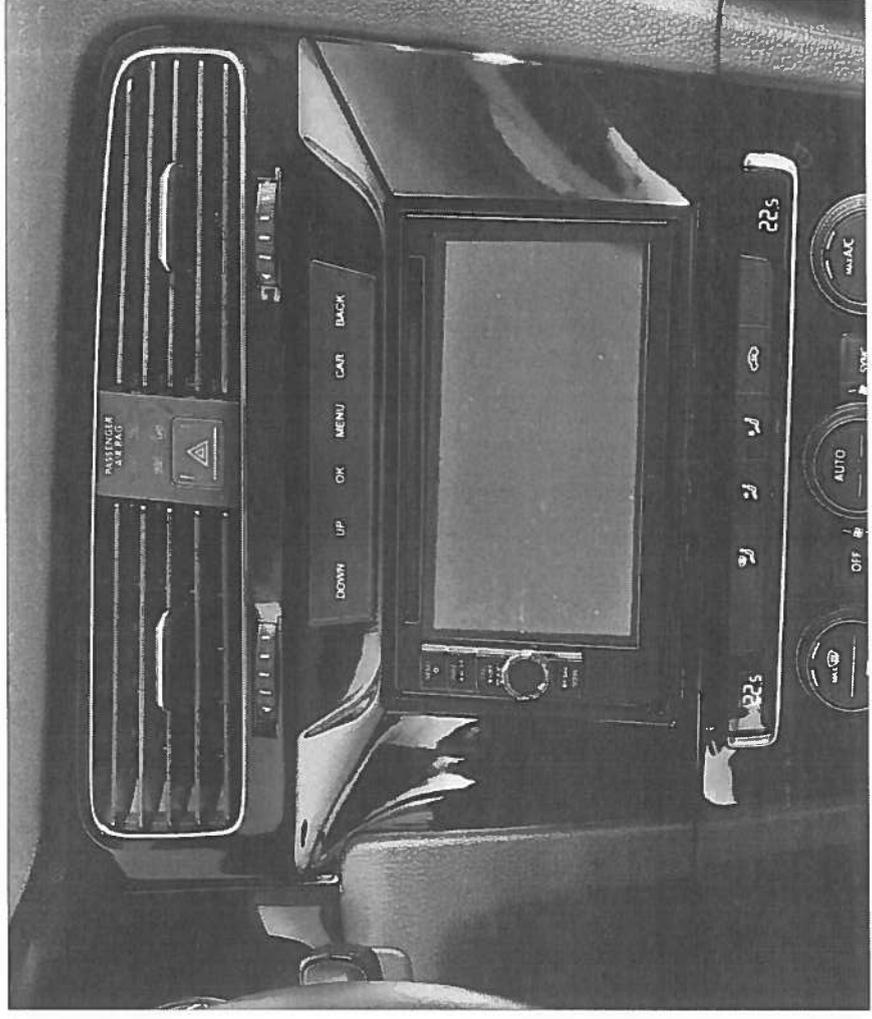

Mount mounting brackets to double DIN head unit


pre-assembly Unit and Brackets

Unit front surface

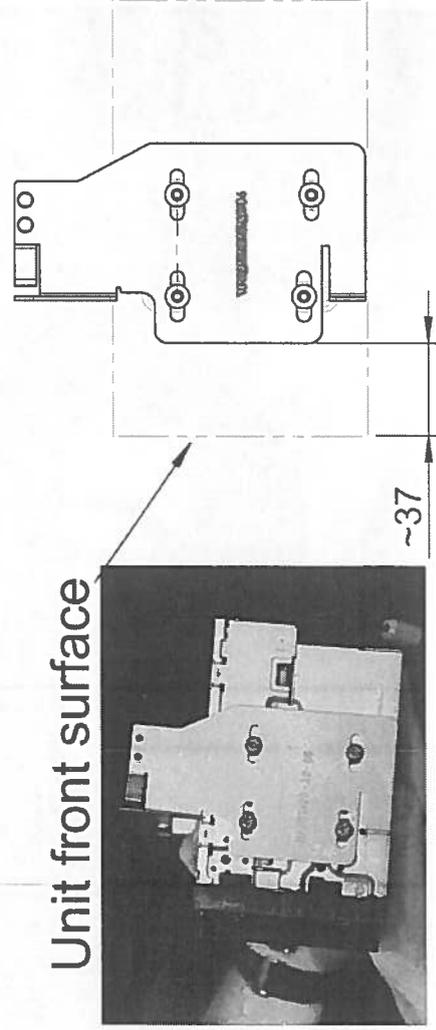

~37

Notes:

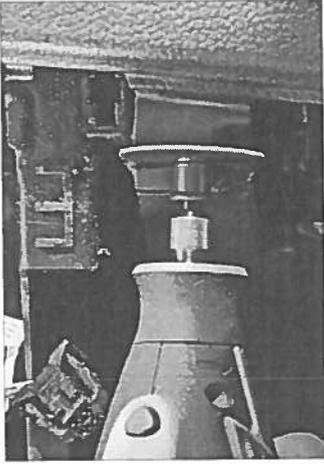


Several plastic parts must be cut and removed in order to clear space for 2-DIN head unit

Cut plastic (see arrows) and remove it



Cut plastic bridge underneath removed plastic (see arrows)

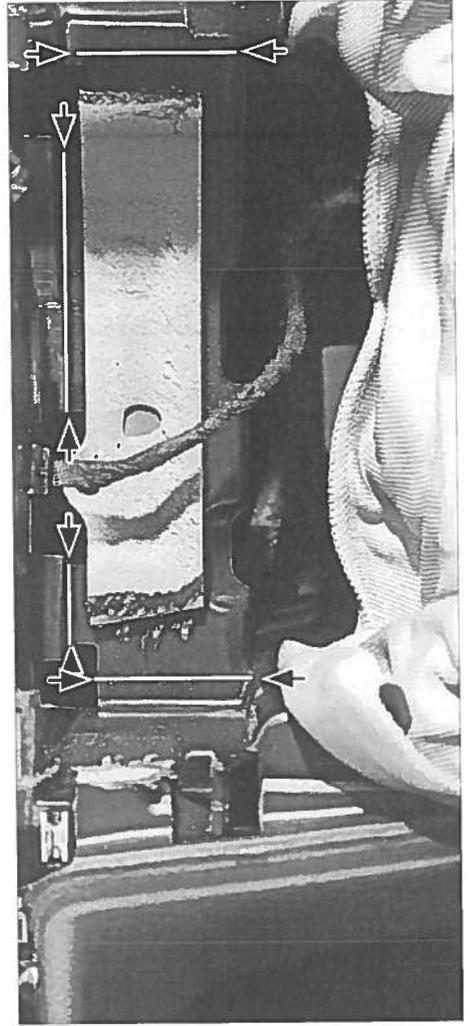



Unclip and remove panel under OEM head unit




Unclip OEM head unit panel



Unclip air vents (special VW tool may be required)

Remove OEM head unit panel by pulling it forward your direction

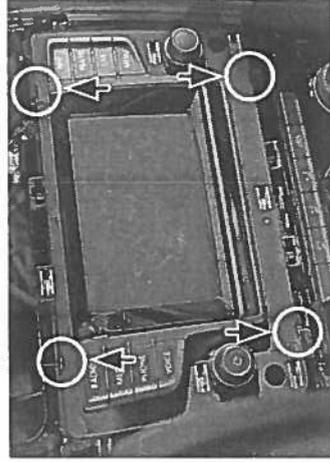

Insert radio release keys
Remove OEM head unit



Notes:

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.




Installation Manual Double DIN Kit

CT23VW12L

• VW Golf VII 2013->

Compatible with these Double-DIN devices:

Double-DIN Navigation

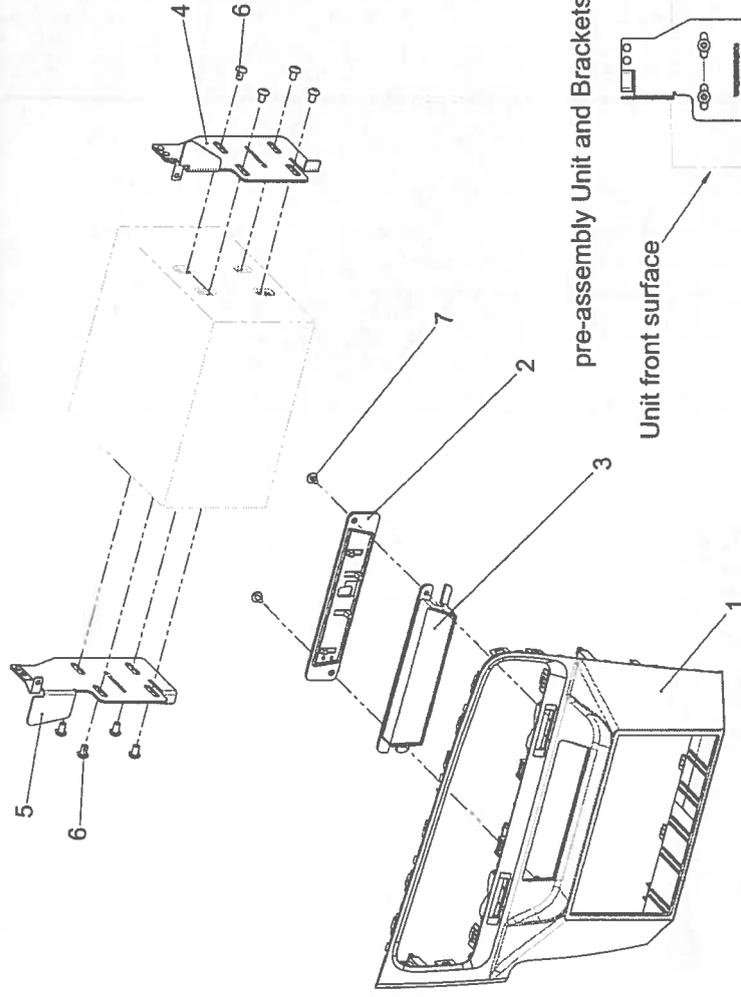

Double DIN Set contents

- (1) Facia Plate
- (2) Cover
- (3) Housing
- (4) Mounting Bracket Right
- (5) Mounting Bracket Left
- (6) Flat Headed Screw
- (7) Self Tapping Screw with Collar

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.